

4






3

2

1

RoHS REACH compliant

REVISION DATA				
SYM	REV	DESCRIPTION	DATE	APPR.
	00	new part	30.03.17	MR

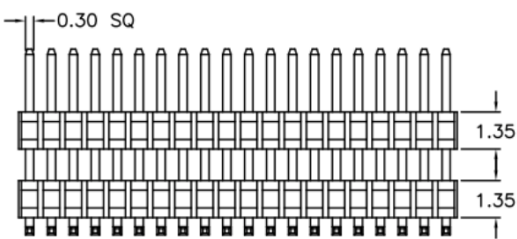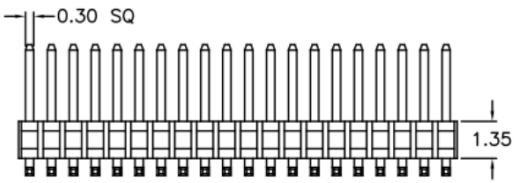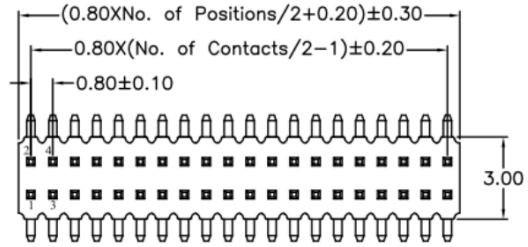

Electrical

Current rating: 0,5Amps/contact max.  
 Contact resistance: ≤ 20mΩ/contact  
 Isolation resistance: ≥ 1000MΩ at V=100V  
 Withstanding Voltage: 300V AC/minute



Material

Contact: Brass  
 Isolator: High Temperature, Thermoplastic UL94V-0  
 Operating temperature: Gold plated: -55°C to +105°C  
 Tin plated: -40°C to +105°C

order information

A080150	xx	xx	xx	xx	xx	xx
No. of Positions	Plating Option	No. of Insulators	Packaging	Dimension	Special	Customer
04*80	01= gold flash	1=1pcs	F= tape&reel with cap	B/ D/ W2		
	xx= on request	2=2pcs	E= tube&cap	B/ C/ D/ W2		
		xx=on request	xx= on request	xx= on request		

Recommended P.C.B Board Layout

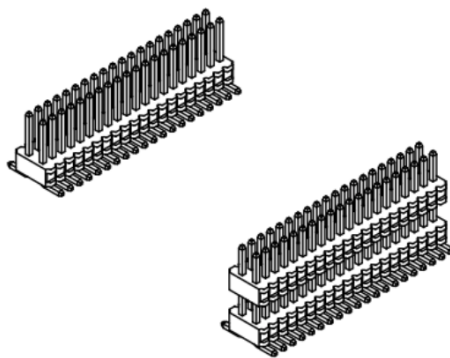

Dual Row Pin Header  
 Straight SMT Type

PROJECTON		general tolerances to DIN ISO 2768-1
DATE	30.03.2017	Customer Drawing- No.:
DRAWN	MR	Drawing- No.: 2160764
CHECKED	BR	
APPROVED	BR	
	UNIT: mm	SCALE: SIZE: A4