

4

3

2

1






REVISION DATA				
SYM	REV	DESCRIPTION	DATE	APPR.
	00	new part	10.03.17	OT

Electrical

Current rating: 1Amps/contact max.
 Contact resistance: $\leq 20m\Omega$ /contact
 Isolation resistance: $\geq 1000M\Omega$ at V=100V
 Withstanding Voltage: 300V AC/minute

Material



Contact: Brass
 Isolator: High Temperature, Thermoplastic UL94V-0
 Operating temperature: Gold plated: -55°C to +105°C
 Tin plated: -40°C to +105°C

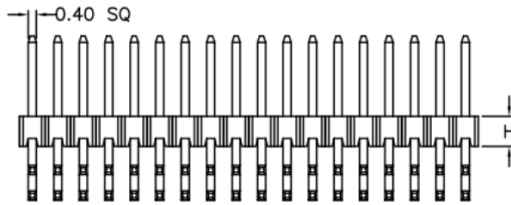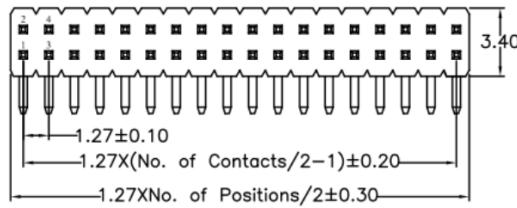

order information

A127122	xx	xx	xx	xx	xx	xx
No. of Positions	Plating Option	Insulator Height	Packaging	Dimension	Special Customer	
04~100	01= gold flash xx= on request	10= H= 1.00mm 15= H= 1.50mm 20= H= 2.00mm 25= H= 2.50mm xx= on request	A= bag xx= on request	A/ B/ D xx= on request		

Recommended P.C.B Board Hole Layout



**Dual Row Pin Header
Right Angle Type**

Tolerance:
 X. ±0.50
 .X ±0.35
 .XX ±0.25
 .XXX ±0.05
 X* ±2*

PROJECTON				
DATE	10.03.2017	Customer Drawing-No.:		
DRAWN	MR	Drawing-No.:		2160780
CHECKED	OT			
APPROVED	BR	UNIT:	SCALE:	SIZE: A4