




REVISION DATA				
SYM	REV	DESCRIPTION	DATE	APPR.
	00	new part	10.03.17	OT

Electrical
 Current rating: 1Amps/contact max.
 Contact resistance: $\leq 20m\Omega$ /contact
 Isolation resistance: $\geq 1000M\Omega$ at V=100V
 Withstanding Voltage: 300V AC/minute

Material
 Contact: Brass
 Isolator: High Temperature, Thermoplastic UL94V-0

Operating temperature: Gold plated: -55°C to +105°C
 Tin plated: -40°C to +105°C

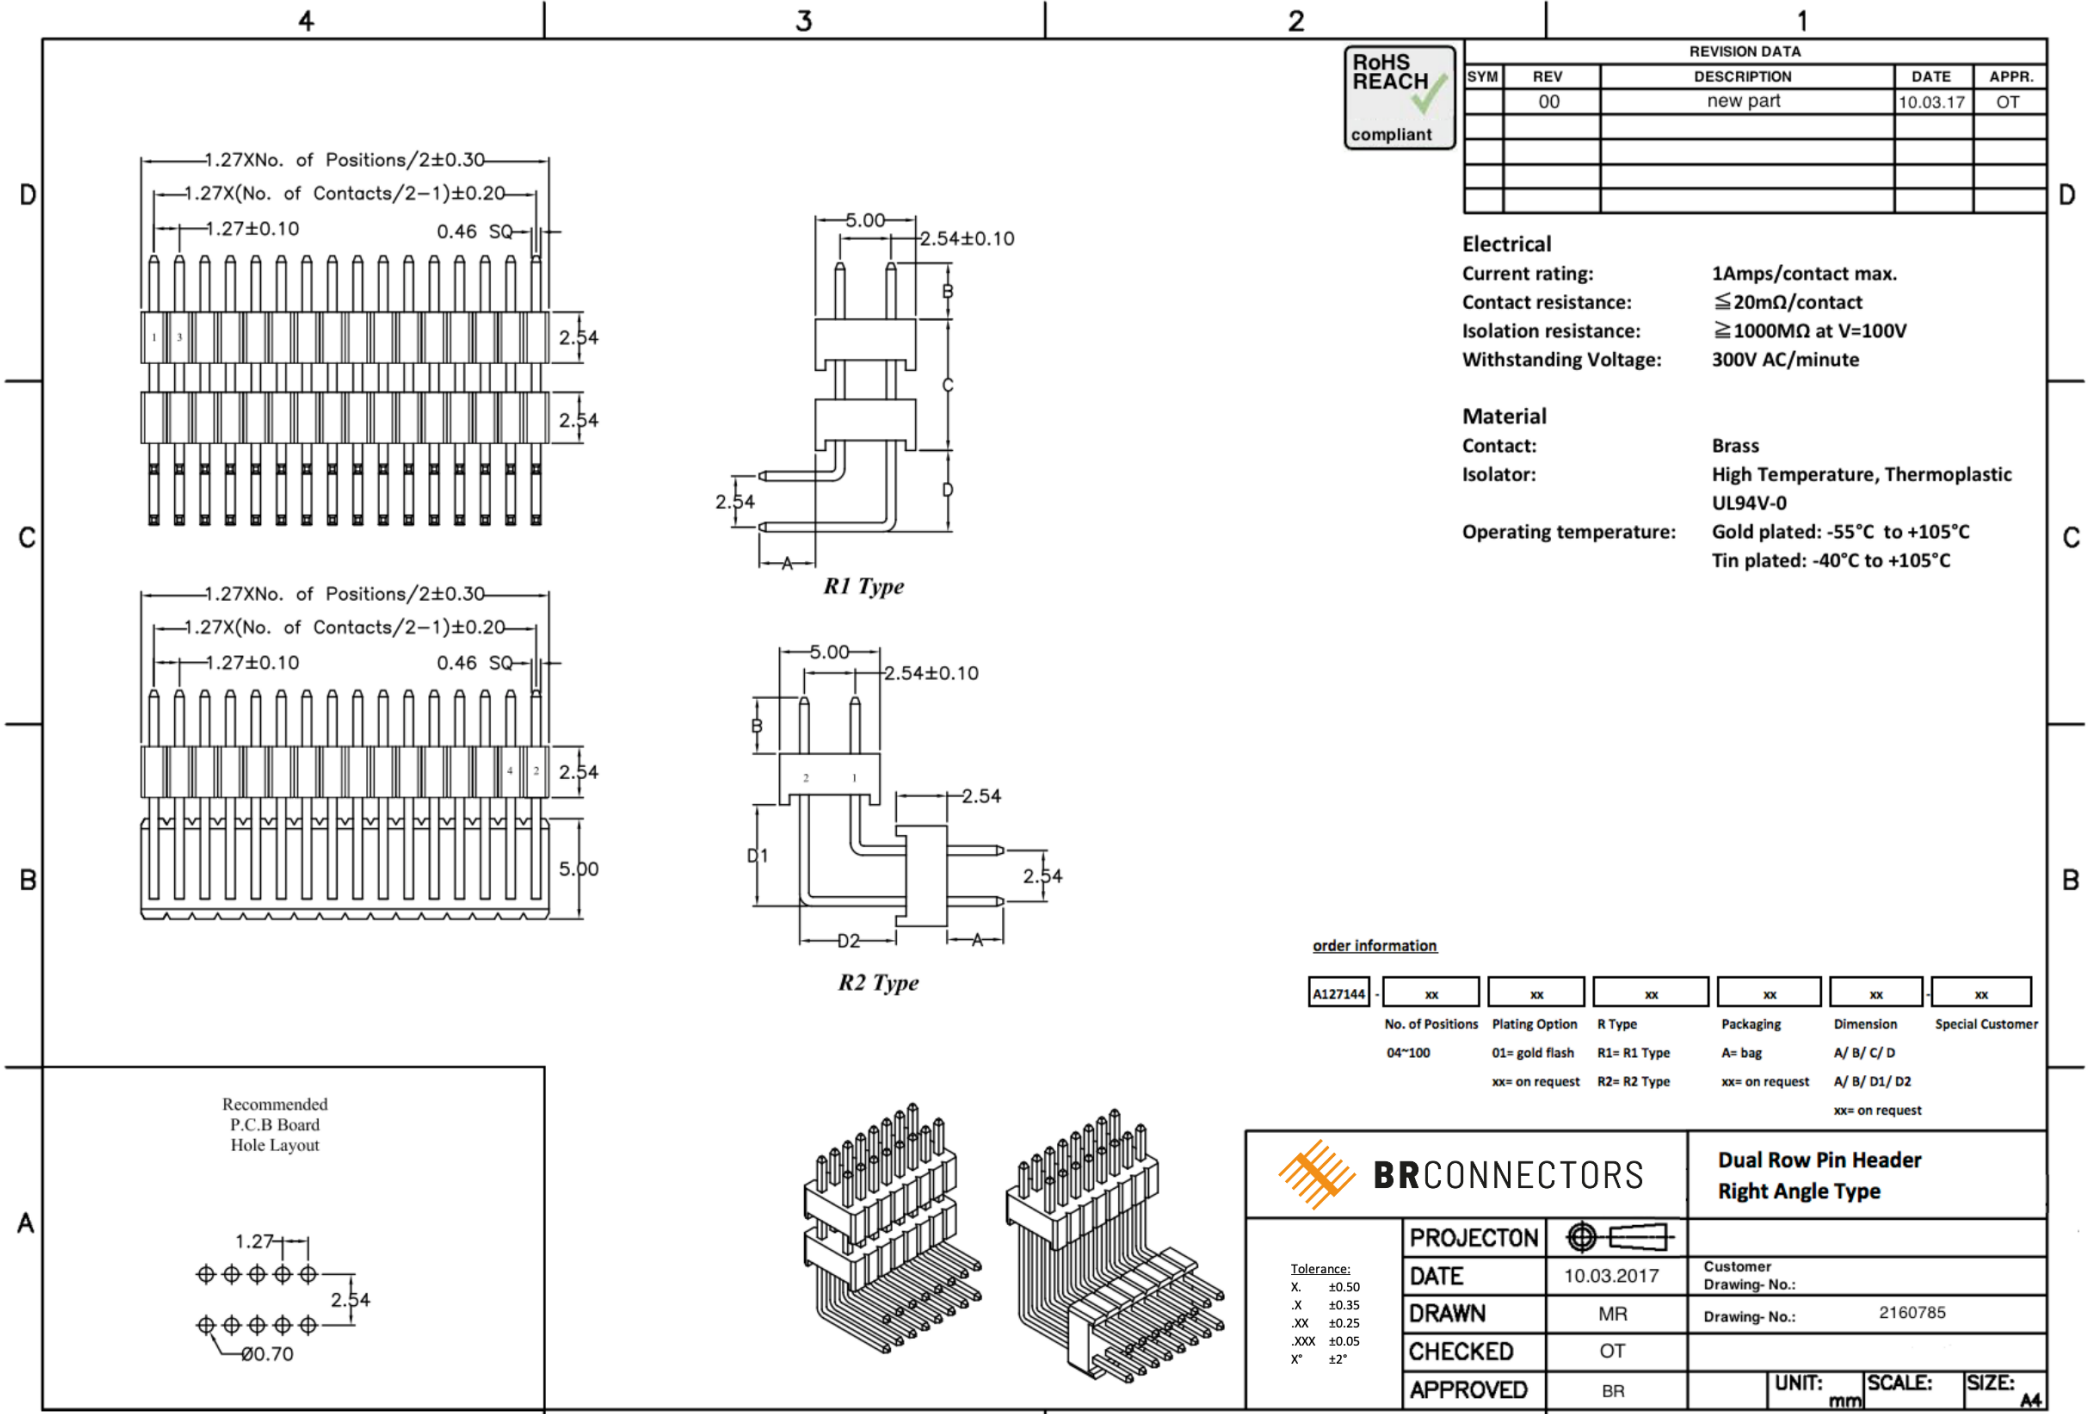

order information

A127144	xx	xx	xx	xx	xx	xx
No. of Positions	Plating Option	R Type	Packaging	Dimension	Special Customer	
04~100	01= gold flash	R1= R1 Type	A= bag	A/ B/ C/ D		
	xx= on request	R2= R2 Type	xx= on request	A/ B/ D1/ D2		
				xx= on request		

	PROJECTON		Dual Row Pin Header Right Angle Type			
	DATE	10.03.2017	Customer Drawing-No.:			
	DRAWN	MR	Drawing-No.: 2160785			
	CHECKED	OT				
	APPROVED	BR	UNIT: mm	SCALE:	SIZE: A4	

Diese Zeichnung ist ausdrücklich Eigentum der BR-connectors GmbH. Ohne vorherige Zustimmung seitens der BR-connectors GmbH darf diese nicht vervielfältigt, noch an Dritte zugänglich gemacht werden. Wir behalten uns alle Rechte vor, auch im Falle einer Patentierung nach Gebrauchsmusterprüfung.