

4

3

2











1

RoHS REACH compliant

REVISION DATA				
SYM	REV	DESCRIPTION	DATE	APPR.
	00	new part	10.03.17	MR

Electrical
Current rating: 1Amps/contact max.
Contact resistance: ≤ 20mΩ/contact
Isolation resistance: ≥ 1000MΩ at V=100V
Withstanding Voltage: 300V AC/minute



Material
Contact: Brass
Isolator: High Temperature, Thermoplastic UL94V-0
Operating temperature: Gold plated: -55°C to +105°C
 Tin plated: -40°C to +105°C

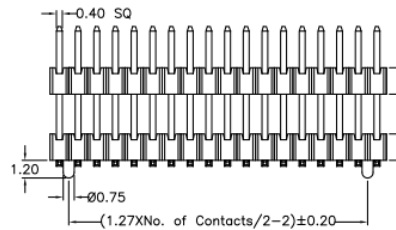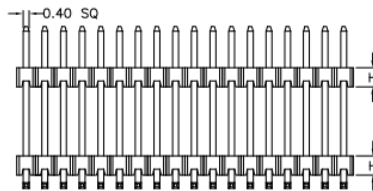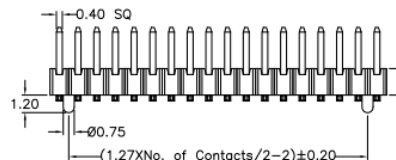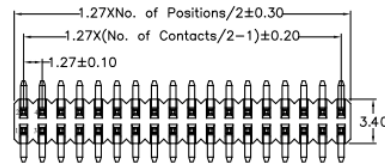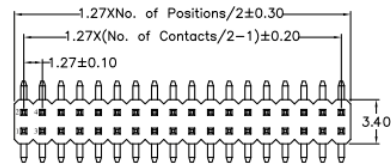

order information

A127152	xx	xx	xx	xx	xx	xx	xx	xx
No. of Positions	Plating Option	No. of Insulators	Insulator Height	Type	Packaging	Dimension	Special Customer	
04~100	01= gold flash	1=1pcs	06= H= 0.65mm	1= with peg	F= tape&reel with cap	B/ D/ W2		
	xx= on request	2=2pcs	10= H= 1.00mm	2= without peg	E= tube&cap	B/ C/ D/ W2		
		xx=on request	15= H= 1.50mm	xx= on request	xx= on request	xx= on request		
			20= H= 2.00mm					
			25= H= 2.50mm					
			xx= on request					

Recommended P.C.B Board Layout

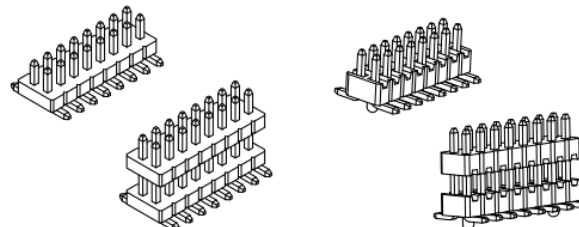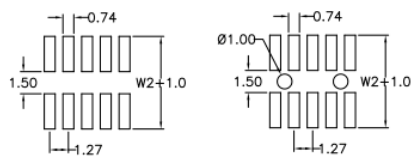

Dual Row Pin Header Straight SMT Type

Tolerance: X. ±0.50 .X ±0.35 .XX ±0.25 .XXX ±0.05 X° ±2°	PROJECTON				
	DATE	10.03.2017	Customer Drawing-No.:		
	DRAWN	MR	Drawing-No.: 2160788		
	CHECKED	BR			
	APPROVED	BR	UNIT: mm	SCALE:	SIZE: A4