

4


3

2

1

RoHS REACH compliant



REVISION DATA				
SYM	REV	DESCRIPTION	DATE	APPR.
	00	new part	20.04.17	MR

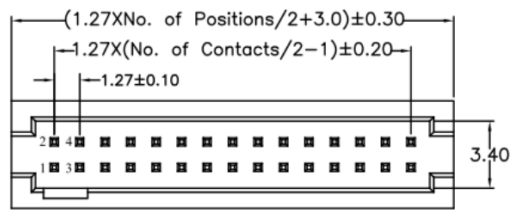

**Electrical**  
 Current rating: 1Amps/contact max.  
 Contact resistance: ≤ 20mΩ/contact  
 Isolation resistance: ≥ 1000MΩ at V=100V  
 Withstanding Voltage: 300V AC/minute

**Material**  
 Contact: Brass  
 Isolator: High Temperature, Thermoplastic UL94V-0



**Operating temperature:** Gold plated: -55°C to +105°C  
 Tin plated: -40°C to +105°C

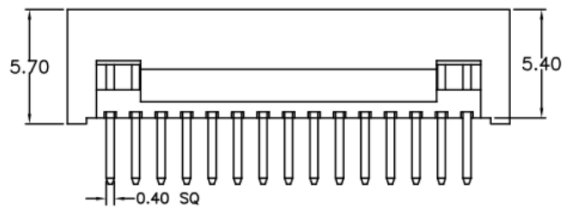

order information

A127180	xx	xx	xx	xx
No. of Positions	Plating Option	Packaging	Special Customer	
04~64	01= gold flash	A= bag		
	xx= on request	xx= on request		

Recommended P.C.B Board Layout

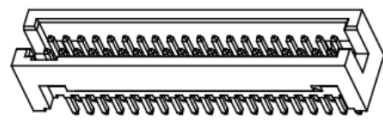

	<b>Box Header Straight Type</b>	
	PROJECTON	
	DATE	20.04.2017
	DRAWN	MR
	CHECKED	BR
APPROVED	BR	
Tolerance: X. ±0.50 .X ±0.35 .XX ±0.25 .XXX ±0.05 X* ±2*	UNIT: mm	SCALE: A4

Diese Zeichnung ist ausdrücklich Eigentum der BR-connectors GmbH. Ohne vorherige Zustimmung seitens der BR-connectors GmbH darf diese nicht vervielfältigt, noch an Dritte zugänglich gemacht werden. Wir behalten uns alle Rechte vor, auch im Falle einer Patentierung nach Gebrauchsmusterprüfung.