

4


3

2

1

RoHS REACH compliant


REVISION DATA				
SYM	REV	DESCRIPTION	DATE	APPR.
	00	new part	20.04.17	MR

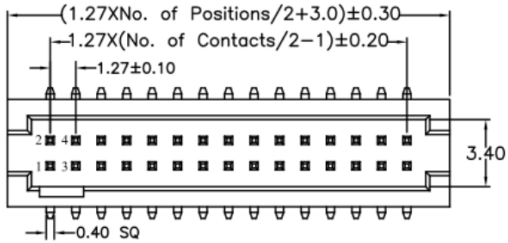

Electrical
Current rating: 1Amps/contact max.
Contact resistance: ≤ 20mΩ/contact
Isolation resistance: ≥ 1000MΩ at V=100V
Withstanding Voltage: 300V AC/minute

Material
Contact: Brass
Isolator: High Temperature, Thermoplastic UL94V-0




Operating temperature: Gold plated: -55°C to +105°C
 Tin plated: -40°C to +105°C



order information

A127184	xx	xx	xx	xx
No. of Positions	Plating Option	Packaging	Special Customer	
04~64	01= gold flash	F= tape&reel with cap		
	xx= on request	E= tube&cap		
		xx= on request		

Recommended P.C.B Board Layout

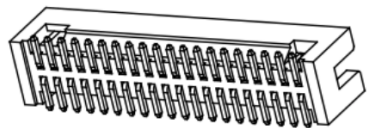

BRCONNECTORS

Box Header Straight SMT Type

Tolerance: X. ±0.50 .X ±0.35 .XX ±0.25 .XXX ±0.05 X* ±2*	PROJECTON				
	DATE	20.04.2017	Customer Drawing-No.:		
	DRAWN	MR	Drawing-No.: 2160795		
	CHECKED	BR			
	APPROVED	BR	UNIT: mm	SCALE:	SIZE: A4