

4



3

2

1



REVISION DATA				
SYM	REV	DESCRIPTION	DATE	APPR.
	00	new part	22.03.17	MR

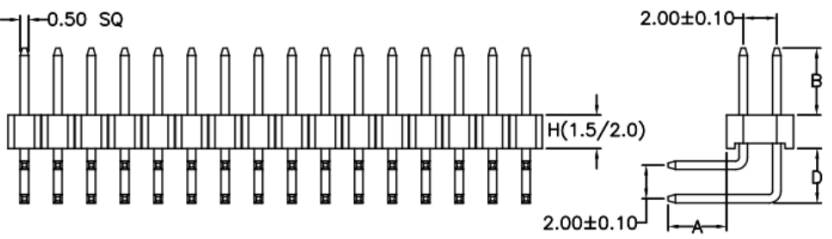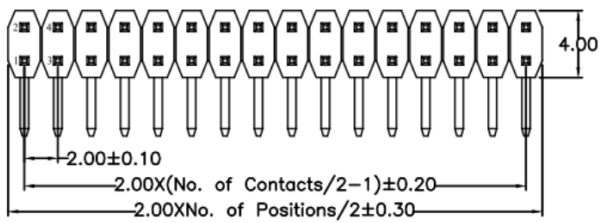

**Electrical**

Current rating: 1,5Amps/contact max.  
 Contact resistance:  $\leq 20m\Omega/\text{contact}$   
 Isolation resistance:  $\geq 1000M\Omega$  at V=100V  
 Withstanding Voltage: 450V AC/minute

**Material**

Contact: Brass  
 Isolator: High Temperature, Thermoplastic UL94V-0

Operating temperature: Gold plated: -55°C to +105°C  
 Tin plated: -40°C to +105°C

C

B

D



C

B

order information

A200120	xx	xx	xx	xx	xx	xx
No. of Positions	Plating Option	Insulator Height	Packaging	Dimension	Special Customer	
04-80	01= gold flash xx= on request	15= H= 1.50mm 20= H= 2.00mm xx= on request	A= bag xx= on request	A/ B/ D xx= on request		

Recommended P.C.B Board Hole Layout



 <b>BRCONNECTORS</b> Dual Row Pin Header Right Angle Type	PROJECTON				
	DATE	22.03.2017	Customer Drawing-No.:		
	DRAWN	MR	Drawing-No.: 2160818		
	CHECKED	BR			
	APPROVED	BR	UNIT: mm	SCALE:	SIZE: A4

2

1

A

4

3

Diese Zeichnung ist ausdrücklich Eigentum der BR-connectors GmbH. Ohne vorherige Zustimmung seitens der BR-connectors GmbH darf diese nicht vervielfältigt, noch an Dritte zugänglich gemacht werden. Wir behalten uns alle Rechte vor, auch im Falle einer Patentierung nach Gebrauchsmusterprüfung.