

4


3

2

1

RoHS REACH compliant



REVISION DATA				
SYM	REV	DESCRIPTION	DATE	APPR.
	00	new part	20.04.17	MR

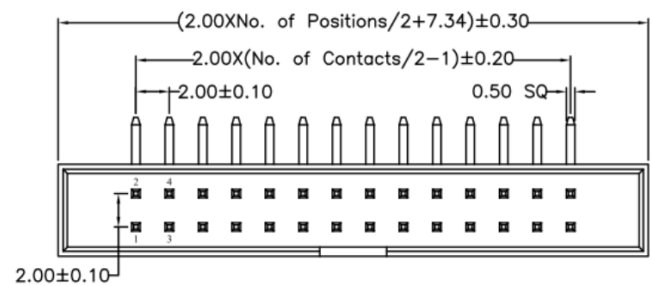

Electrical
Current rating: 1,5Amps/contact max.
Contact resistance: ≤ 20mΩ/contact
Isolation resistance: ≥ 1000MΩ at V=100V
Withstanding Voltage: 450V AC/minute

Material
Contact: Brass
Isolator: High Temperature, Thermoplastic UL94V-0



Operating temperature: Gold plated: -55°C to +105°C
 Tin plated: -40°C to +105°C

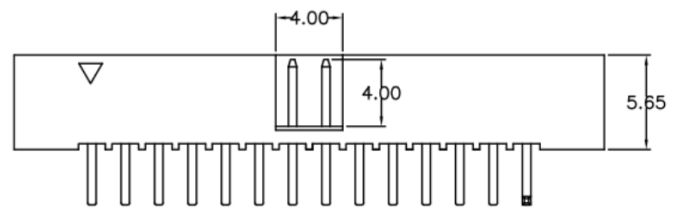

order information

A200184	xx	xx	xx	xx
No. of Positions	Plating Option	Packaging	Special Customer	
06-64	01= gold flash	B= tray		
	xx= on request	C= tube		
		xx= on request		

Recommended P.C.B Board Hole Layout

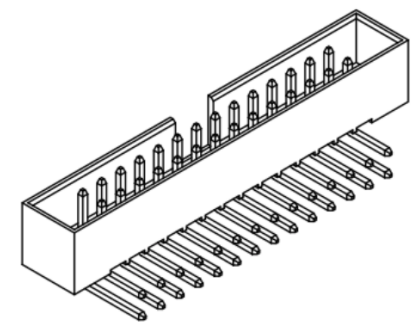

	PROJECTON		Box Header Right Angle Type		
	DATE	20.04.2017	Customer Drawing-No.:		
	DRAWN	MR	Drawing-No.: 2160829		
	CHECKED	BR			
	APPROVED	BR	UNIT: mm	SCALE:	SIZE: A4