

4


3

2

1

RoHS REACH compliant

REVISION DATA				
SYM	REV	DESCRIPTION	DATE	APPR.
	00	new part	30.03.17	MR

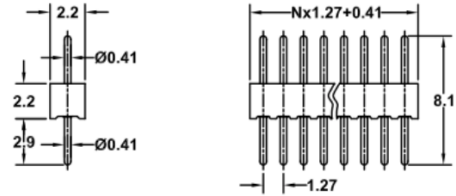


Technical Spezifications

- Insulator: Black glass filled polyester PPS+GF30
- Flammability: UL 94V-0
- Sleeve: Brass CuZn36Pb3(C36000)
- Mating Pin Ø: 0.41mm
- Mechanical Life: Min. 500 cycles
- Rated Current: 1 A
- Contact Resistance: Max. 20mΩ
- Dielectric Steength: Min. 1000VRMS

order information

AP127101	xx	xx	xx	xx
No. of Positions	Plating Option	Packaging	Special Customer	
02-50	01= gold flash	C= tube		
	100= tin	xx= on request		
	xx= on request			



	<b>BRCONNECTORS</b>		<b>Single Row Precision Pin Header Straight Type</b>		
	PROJECTON				
	DATE	30.03.2017	Customer Drawing-No.:		
	DRAWN	MR	Drawing-No.: 2160908		
	CHECKED	BR			
APPROVED	BR	UNIT:	SCALE:	SIZE:	A4

A

D

C

B

D

C

B

4

3

2

1