

4


3

2

1

RoHS REACH compliant

REVISION DATA				
SYM	REV	DESCRIPTION	DATE	APPR.
	00	new part	30.03.17	MR

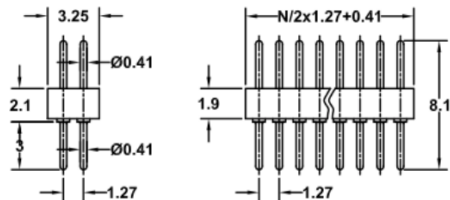


Technical Spezifications

- Insulator: Black glass filled polyester PPS+GF30
- Flammability: UL 94V-0
- Sleeve: Brass CuZn36Pb3(C36000)
- Mating Pin Ø: 0.41mm
- Mechanical Life: Min. 500 cycles
- Rated Current: 1 A
- Contact Resistance: Max. 20mΩ
- Dielectric Steength: Min. 1000V_{RMS}

order information

AP127102	xx	xx	xx	xx
No. of Positions	Plating Option	Packaging	Special Customer	
04~100	01= gold flash 100= tin xx= on request	C= tube xx= on request		



	Dual Row Precision Pin Header Straight Type		
	PROJECTON		
	DATE	30.03.2017	
	DRAWN	MR	
	CHECKED	BR	
APPROVED	BR		
	UNIT:	SCALE:	SIZE:
	mm		A4

Tolerance:
 X. ±0.50
 .X ±0.30
 .XX ±0.20
 .XXX ±0.05
 X* ±2"

Diese Zeichnung ist ausdrücklich Eigentum der BR-connectors GmbH. Ohne vorherige Zustimmung seitens der BR-connectors GmbH darf diese nicht vervielfältigt, noch an Dritte zugänglich gemacht werden. Wir behalten uns alle Rechte vor, auch im Falle einer Patentierung nach Gebrauchsmusterprüfung.