

4


3

2

1

RoHS REACH compliant

REVISION DATA				
SYM	REV	DESCRIPTION	DATE	APPR.
	00	new part	30.03.17	MR

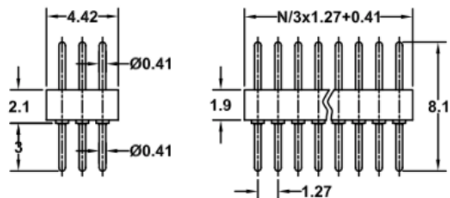

Technical Spezifications

Insulator: Black glass filled polyester PPS+GF30
 Flammability: UL 94V-0
 Sleeve: Brass CuZn36Pb3(C36000)
 Mating Pin Ø: 0.41mm
 Mechanical Life: Min. 500 cycles
 Rated Current: 1 A
 Contact Resistance: Max. 20mΩ
 Dielectric Steength: Min. 1000V_{RMS}

order information

AP127103	xx	xx	xx	xx
No. of Positions	Plating Option	Packaging	Special Customer	
09*150	01= gold flash	C= tube		
	100= tin	xx= on request		
		xx= on request		



	BRCONNECTORS		Triple Row Precision Pin Header Straight Type		
	PROJECTON				
	DATE	30.03.2017	Customer Drawing-No.:		
	DRAWN	MR	Drawing-No.: 2160910		
	CHECKED	BR			
APPROVED	BR		UNIT: mm	SCALE:	SIZE: A4

Tolerance:
 X. ±0.50
 .X ±0.30
 .XX ±0.20
 .XXX ±0.05
 X* ±2"