

4


3

2

1

RoHS REACH compliant

| REVISION DATA | | | | |
|---------------|-----|-------------|----------|-------|
| SYM | REV | DESCRIPTION | DATE | APPR. |
| | 00 | new part | 30.03.17 | MR |
| | | | | |
| | | | | |
| | | | | |

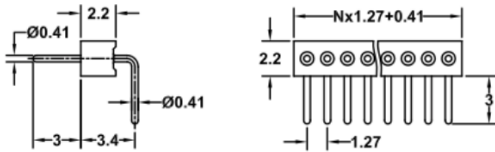


Technical Spezifications

Insulator: Black glass filled polyester PPS+GF30
 Flammability: UL 94V-0
 Sleeve: Brass CuZn36Pb3(C36000)
 Mating Pin Ø: 0.41mm
 Mechanical Life: Min. 500 cycles
 Rated Current: 1 A
 Contact Resistance: Max. 20mΩ
 Dielectric Steength: Min. 1000V_{RMS}

order information

| | | | | | |
|------------------|----------------------------|---------------------------|------------------|----|----|
| AP127121 | - | xx | xx | xx | xx |
| No. of Positions | Plating Option | Packaging | Special Customer | | |
| 02~50 | 01= gold flash 100= tin | C= tube xx= on request | | | |
| | | xx= on request | | | |



| | | | | | |
|----------|---------------------|------------|---|--------|----------|
| | BRCONNECTORS | | Single Row Precision Pin Header Right Angle Type | | |
| | PROJECTON | | | | |
| | DATE | 30.03.2017 | Customer Drawing-No.: | | |
| | DRAWN | MR | Drawing-No.: 2160913 | | |
| | CHECKED | BR | | | |
| APPROVED | BR | | UNIT: mm | SCALE: | SIZE: A4 |

Tolerance:
 X. ±0.50
 .X ±0.30
 .XX ±0.20
 .XXX ±0.05
 X" ±2"

D
C
B
A

D
C
B
A

4

3

2

1