

4


3

2

1

RoHS REACH compliant

REVISION DATA				
SYM	REV	DESCRIPTION	DATE	APPR.
	00	new part	30.03.17	MR

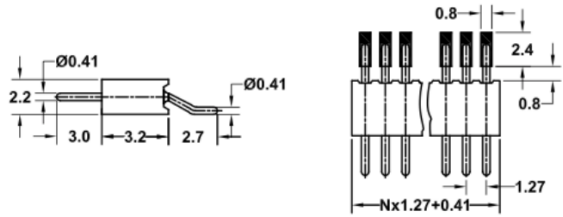

Technical Spezifications

- Insulator: Black glass filled polyester PPS+GF30
- Flammability: UL 94V-0
- Sleeve: Brass CuZn36Pb3(C36000)
- Mating Pin Ø: 0.41mm
- Mechanical Life: Min. 500 cycles
- Rated Current: 1 A
- Contact Resistance: Max. 20mΩ
- Dielectric Steength: Min. 1000V_{RMS}
- Coplanariny SMD
- Terminations: Max. 0.1mm (measured on 25mm long connectors)

order information

AP127157	-	xx	xx	xx	-	xx
No. of Positions	Plating Option	Packaging	Special Customer			
02=50	01= gold flash	F= tape&reel with cap				
	100= tin	xx= on request				
		xx= on request				

	BRCONNECTORS		Single Row Precision Pin Header Right Angle SMT			
	PROJECTON					
	DATE	30.03.2017	Customer Drawing-No.:			
	DRAWN	MR	Drawing-No.: 2160921			
	CHECKED	BR				
APPROVED	BR	UNIT:	SCALE:	SIZE:	A4	