

4


3

2

1

RoHS REACH compliant

REVISION DATA				
SYM	REV	DESCRIPTION	DATE	APPR.
	00	new part	30.03.17	MR

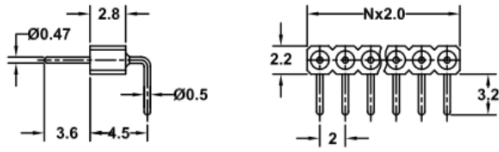


Technical Spezifications

Insulator: Black glass filled polyester PPS-GF30-FR
 Flammability: UL 94V-0
 Sleeve: Brass CuZn36Pb3(C36000)
 Mating Pin ϕ : 0.47mm
 Mechanical Life: Min. 500 cycles
 Rated Current: 3 A
 Contact Resistance: Max. 10m Ω
 Dielectric Steength: Min. 1000V_{RMS}

order information

AP200102	-	xx	xx	xx	xx
	No. of Positions	Plating Option	Packaging	Special Customer	
	04~100	01= gold flash	C= tube		
		100= tin	xx= on request		
			xx= on request		



	BRCONNECTORS		Single Row Precision Pin Header Right Angle Type		
	PROJECTON				
	DATE	30.03.2017	Customer Drawing-No.:		
	DRAWN	MR	Drawing-No.: 2160943		
	CHECKED	BR			
APPROVED	BR	UNIT:	SCALE:	SIZE:	A4

Diese Zeichnung ist ausdrücklich Eigentum der BR-connectors GmbH. Ohne vorherige Zustimmung seitens der BR-connectors GmbH darf diese nicht vervielfältigt, noch an Dritte zugänglich gemacht werden. Wir behalten uns alle Rechte vor, auch im Falle einer Patentierung nach Gebrauchsmusterprüfung.