

4


3

2

1

RoHS REACH compliant

REVISION DATA				
SYM	REV	DESCRIPTION	DATE	APPR.
	00	new part	30.03.17	MR

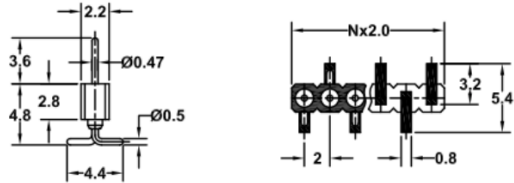

Technical Spezifications

- Insulator: Black glass filled polyester PPS-GF30-FR
- Flammability: UL 94V-0
- Sleeve: Brass CuZn36Pb3(C36000)
- Mating Pin Ø: 0.47mm
- Mechanical Life: Min. 500 cycles
- Rated Current: 3 A
- Contact Resistance: Max. 10mΩ
- Dielectric Steength: Min. 1000V_{RMS}
- Coplanariny SMD
- Terminations: Max. 0.1mm (measured on 25mm long connectors)

order information

AP200151	-	xx	xx	xx	xx
No. of Positions	Plating Option	Packaging	Special Customer		
03-50	01= gold flash	F= tape&reel with cap			
	100= tin	xx= on request			
		xx= on request			



	BRCONNECTORS		Single Row Precision Pin Header Straight SMT Type		
	PROJECTON				
	DATE	30.03.2017	Customer Drawing-No.:		
	DRAWN	MR	Drawing-No.: 2160945		
	CHECKED	BR			
APPROVED	BR		UNIT: mm	SCALE:	SIZE: A4

Tolerance:
 X. ±0.50
 .X ±0.30
 .XX ±0.20
 .XXX ±0.05
 X* ±2"