

4


3

2

1

RoHS REACH compliant

REVISION DATA				
SYM	REV	DESCRIPTION	DATE	APPR.
	00	new part	30.03.17	MR

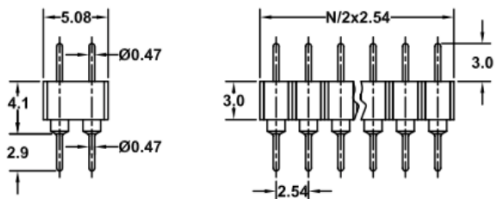

Technical Spezifications

- Insulator: Black glass filled polyester PPS-GF30-FR
- Flammability: UL 94V-0
- Sleeve: Brass CuZn36Pb3(C36000)
- Mating Pin Ø: 0.45mm / 0.48 mm
- Mechanical Life: Min. 500 cycles
- Rated Current: 3 A
- Contact Resistance: Max. 10mΩ
- Dielectric Steength: Min. 1000V_{RMS}


order information

AP254108	xx	xx	xx	xx
No. of Positions	Plating Option	Packaging	Special Customer	
02~80	01= gold flash 100= tin	C= tube xx= on request		
		xx= on request		



Dual Row Precision Pin Header Straight Type

Tolerance: X. ±0.50 .X ±0.30 .XX ±0.20 .XXX ±0.05 X* ±2*	PROJECTON		
	DATE	30.03.2017	Customer Drawing-No.:
	DRAWN	MR	Drawing-No.: 2160965
	CHECKED	BR	
	APPROVED	BR	



UNIT: mm SCALE: SIZE: A4

D
C
B
A

D
C
B
A

4

3

2

1

Diese Zeichnung ist ausdrücklich Eigentum der BR-connectors GmbH. Ohne vorherige Zustimmung seitens der BR-connectors GmbH darf diese nicht vervielfältigt, noch an Dritte zugänglich gemacht werden. Wir behalten uns alle Rechte vor, auch im Falle einer Patentierung nach Gebrauchsmusterprüfung.