

4


3

2

1

RoHS REACH compliant

REVISION DATA				
SYM	REV	DESCRIPTION	DATE	APPR.
	00	new part	30.03.17	MR

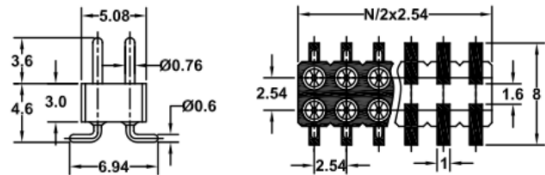


Technical Spezifications

- Insulator: Black glass filled polyester PPS+GF30
- Flammability: UL 94V-0
- Sleeve: Brass CuZn36Pb3(C36000)
- Mating Pin Ø: 0.76mm
- Mechanical Life: Min. 500 cycles
- Rated Current: 3 A
- Contact Resistance: Max. 10mΩ
- Dielectric Steength: Min. 1000VRMS
- Coplanariny SMD Terminations: Max. 0.1mm (measured on 25mm long connectors)

order information

AP254156	xx	xx	xx	xx
No. of Positions	Plating Option	Packaging	Special Customer	
04~72	01= gold flash 100= tin	F= tape&reel with cap xx= on request		



	BRCONNECTORS		Dual Row Precision Pin Header Straight SMT Type		
	PROJECTON				
	DATE	30.03.2017	Customer Drawing-No.:		
	DRAWN	MR	Drawing-No.: 2160990		
	CHECKED	BR			
APPROVED	BR	UNIT:	SCALE:	SIZE:	A4

Tolerance:
 X. ±0.50
 .X ±0.30
 .XX ±0.20
 .XXX ±0.05
 X" ±2"

D
C
B
A

D
C
B
A

4

3

2

1